




Features

- ARM Based HMI
- Fanless design
- Flat front panel touch screen
- Freescale i.MX6 DualLite ARM Cortex A9 processor
- Onboard 1GB DDR3 DRAM
- Onboard 4GB eMMC Flash
- DC 9~36V wide-ranging power input
- LED backlight LCD
- Resistive touch window/Projected capacitive touch

Specifications

System	
CPU	Freescale i.MX6 Dual Lite, ARM Cortex A9(2x Cores,1.0GHz)
System Chipset	NA
Memory	Onboard 1GB DDR3 DRAM
External IO Port	
USB	2 x USB 2.0 type A 1 x USB 2.0 (Micro B Type)
Serial / Parallel	1 x RS-232/422/485 DB9 , default RS-232
LAN	1 x GbE LAN RJ-45 (POE for option)
Audio	1 x Speaker-out(Optional)
Power	1 x 3-pin terminal block connector
Option	TB-508CAN1 TB-508C1
Storage Space	
HDD	Onboard 4GB eMMC NAND Flash
Movable device	1 x micro SD slot
Expansion	
Onboard expansion bus	1 x mini-PCIe slot(full size) 1 x Sim Card slot
Display	
Display Type	12.1" TFT-LCD
Max. Resolution	800 x 600 / 1024 x 768
Max. Color	262K / 16.2M
Luminance (cd/m ²)	450 / 500
View Angle	178(H) /178(V) / 178(H) /178(V)
Contrast	1500:1 / 1000:1
Backlight Lifetime	50,000 hrs / 30,000 hrs
Touch Screen	
Type	Resistive Touch (for R Model) Projected Capacitive Touch (for P Model) Glass (for G model)
Interface	SPI(Resistive Touch) / USB(Projected Capacitive Touch)
Light Transmission(%)	Resistive Touch : 80% Projected Capacitive : 90%
Power	
Power Input	DC 9~36V
Power Consumption	ARMPAC-612P: 10.9W (MAX)

Dimensions

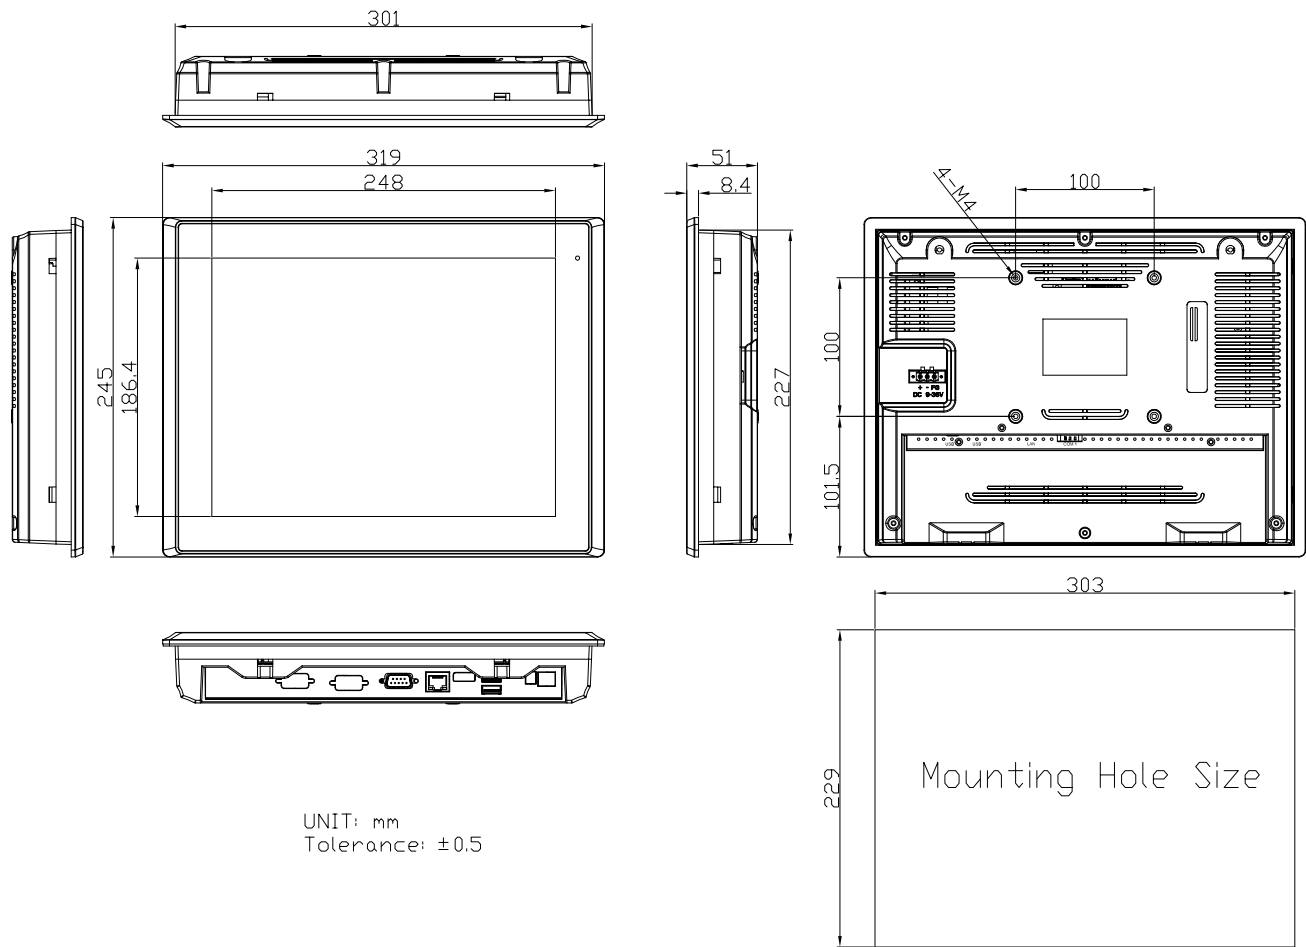

UNIT: mm
Tolerance: ±0.5

Mechanical	
Construction	Plastic front bezel and Chassis
Mounting	Panel Mount , VESA mount 100x100
IP Rating	IP65 compliant front bezel
Dimensions	319 x 245 x 51 mm
Net Weight	2.8 kg
Environmental	
Operating Temperature	0~50°C/ -20~60°C (option)
Storage Temperature	-30~70°C
Humidity	10 to 95% @ 40°C, non- condensing
Certificate	CE/FCC Class A / UL
Operating System Support	
Android 6.0.1 / Linux 4.9.88 + Chromium Browser V67	
Ordering Information	
ARMPAC-612	12.1" SVGA fanless HMI barebone with Freescale i.MX6 DualLite ARM Cortex A9,1GB DDR3 RAM,4GB eMMC, Resistive touch, 9~36VDC input with adapter, plastic chassis.
ARMPAC-612P	12.1" SVGA fanless HMI barebone with Freescale i.MX6 DualLite ARM Cortex A9,1GB DDR3 RAM,4GB eMMC, Projected capacitive touch, 9~36VDC input with adapter, plastic chassis.