

TB-6029

AD Board


AD Board, VGA / DVI-D / DP / HDMI / USB

Features

- Display Processing Engine
- Wide Range DC 9~36V Power Input
- VGA/DVI-D/DP/HDMI Input Interface
- Audio Line-in with 2 x 3W AMP Function
- OSD Function Support

Packing List

- 1 x TB-6029 AD Board

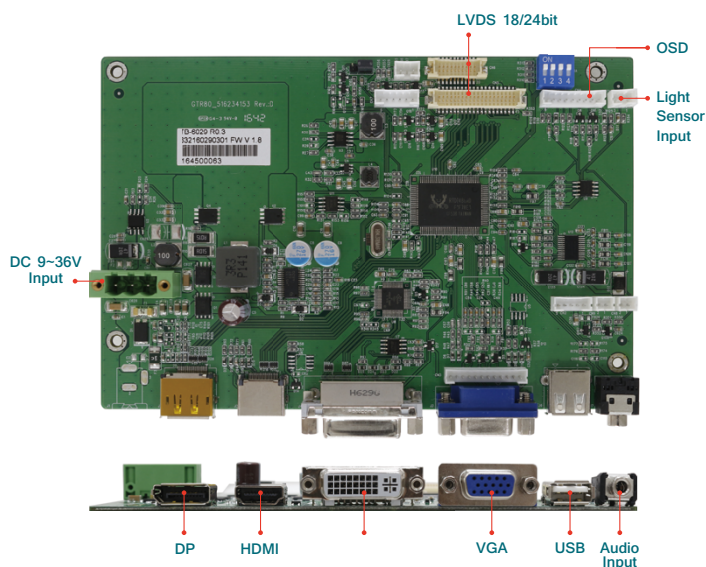

Specifications

System

System Chipset	Realtek RTD2483AD-CG
----------------	----------------------

I/O

USB	1 x USB type A
-----	----------------

Display

VGA Interface	1 x VGA input Port, DB15 connector
TTL/LVDS Interface	1 x 18/24-bit dual channel LVDS
HDMI Interface	1 x HDMI input
DVI Interface	1 x DVI-D input
Display Port Interface	1 x DP input
Resolution	Up to 1920 x1200 for LVDS

Mechanical & Environment

Board Size (L x M)	170 mm x 115 mm
Gross Weight	0.3 kg
Operating Temperature	-20°C~70°C (-4°F~158°F)
Storage Temperature	-40°C~85°C (-40°F~185°F)
Humidity	0%~80%, non-condensing, operating
Certificate	Meet RoHS 2.0/CE/FCC Class A

Power Management

Power Input	Wide range DC 9~36V Input
Power Connector	1 x 3-Pin power input connector

Ordering Information

TB-6029	ADBOARD, VGA, DVI, DP, HDMI, USB, DC 9~36V
---------	--

Dimension

